




Innovative plastics for the automotive industry



SAXALAC™
ABS


SAXAMID™
PA





SAX® Polymers

Engineering plastics

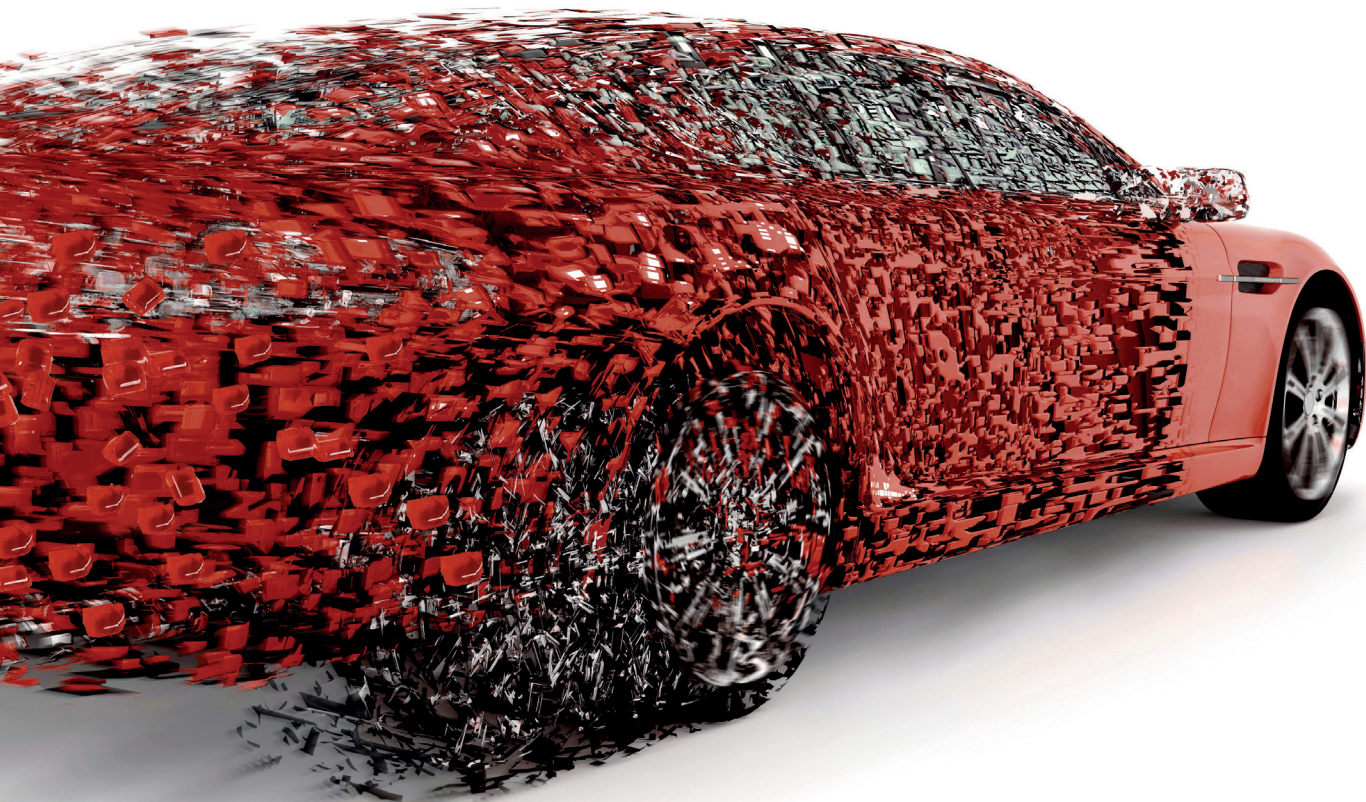

**SAXALAC™
ABS**


**SAXAMID™
PA**

Automotive

**From the idea to the
finished product**

SAX® Polymers specializes in the production, processing and colouring of engineering plastics. The ISO 9001 certified company with production facilities in Austria and Switzerland is your partner for applications in the automotive industry. SAX® Polymers offers ABS and PA compounds under the brand names SAXALAC™ and SAXAMID™. Their product characteristic are individually tailored for interior and exterior as well as for applications under the hood.

Our technical team supports you from the initial idea to the final product including part and mould design as well as processing and quality control.

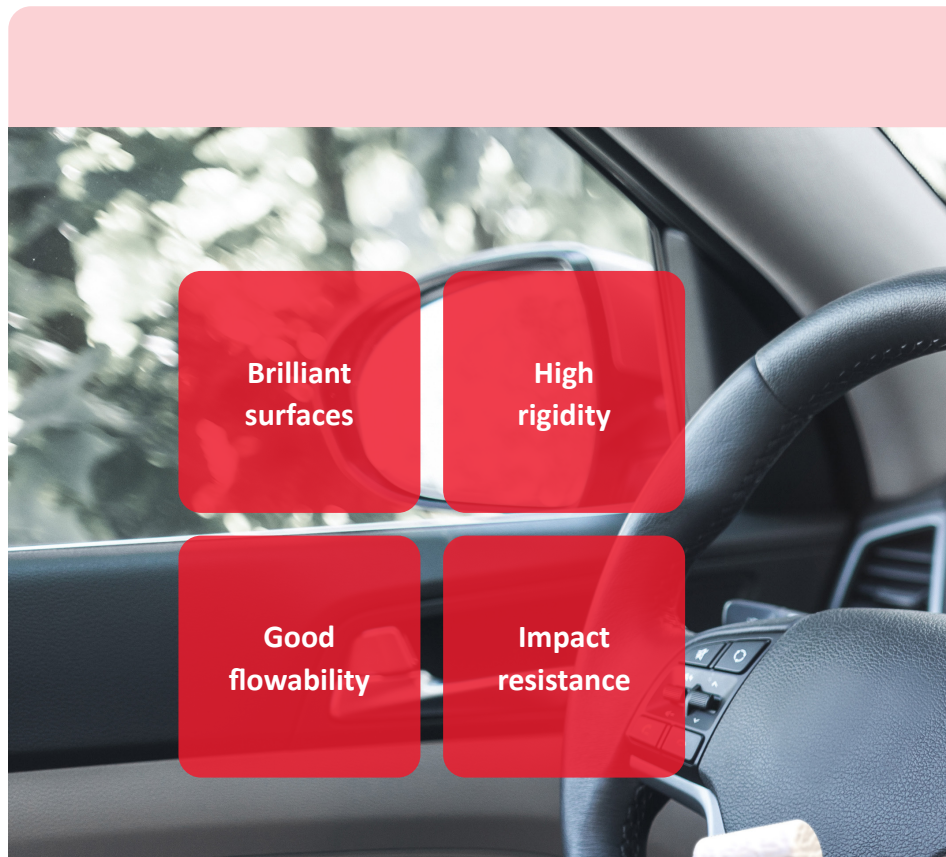

In the automotive industry, ABS plays a significant role for applications requiring high-quality aesthetics and pleasing haptics. The range of SAXALAC™ products provides solutions for various applications. These grades differ in technical properties like flowability, impact strength, rigidity, emission and surface quality. SAXALAC™ is available in a broad variety of colours, making it an attractive material for applications with required colour depth and glossy surface. The very good flowability of the SAXALAC™ electroplating grade allows the production of thin walled parts with short cycle times and high standards regarding product design.



ABS

SAXALAC™



SAXALAC™ 808GF17

Glass fibre reinforced

17% glass fibre ensure an increased tensile strength, rigidity and heat resistance of this ABS injection moulding grade. The outstanding feature of SAXALAC™ 808GF17 is its surface quality. Therefore, it is suitable for applications, which have to meet visual and technical requirements.

VICAT B/50 (ISO 306)

MVR 230 °C/10kg (ISO 1133)

Tensile modulus (ISO 527-1)

Impact strength Charpy 23 °C
(ISO 179/1eA)

104 °C
8 cm ³ /10min
6300 N/mm ²
7 KJ/m ²



SAXALAC™ 820PG

Electroplating

SAXALAC™ 820PG is an electroplatable grade with outstanding flow properties allowing to realise complex parts. Very good chrome adhesion and optimised processability are the outstanding characteristics of this ABS grade, which is intended to be used for aesthetic applications.

100 °C

20 cm³/10min

2300 N/mm²

25 KJ/m²



SAXALAC™ 801

Heat resistant

SAXALAC™ 801 is a heat resistant ABS grade with very good impact strength, high rigidity and low emission. Its very good paintability opens up many possibilities for interior applications like air vents, covers or cinematic parts.

105 °C

20 cm³/10min

2400 N/mm²

fara ruptura

SAXALAC™ 802

High heat resistant

A high degree of rigidity and low emission values are not a contradiction, as shown by this high heat resistant ABS grade. Easy processability makes SAXALAC™ 802 the first choice for rear mirrors, rear lights and various interior applications.

109 °C

16 cm³/10min

2650 N/mm²

7 KJ/m²

SAXALAC™ 820LE

Low emission

SAXALAC™ 820LE is a low-emission standard ABS grade targeting the requirements of different OEMs for interior applications.

Very good processability and excellent surface quality make this SAX® Polymers product an excellent alternative on the market.

100 °C

20 cm³/10min

2300 N/mm²

25 KJ/m²



PA **SAXAMID™**





**Outstanding
rigidity**

**High
impact**

Chemical resistance

The SAXAMID™ portfolio includes polyamide 6 and polyamide 66. Besides excellent strength and toughness, these engineering plastics are characterised by chemical resistance to organic solvents and mineral lubricants. Due to its property profile, this product group can be modified like no other with various additives (e.g. glass fibre, carbon fibre, glass beads, mineral fillers, impact modifiers, flame retardants etc.) in order to meet the requirements of the automotive industry. SAXAMID™ grades can be utilized wherever high technical requirements have to be met. Hence, demanding applications for motors and gears, as well as for cooling and fuel systems can be realized. Furthermore, there are numerous possibilities for interior and exterior parts.

Product diversity

SAXAMID™ 126F2K4

High surface quality

The combination of glass fibres and beads facilitates the production of low warpage parts, which show high surface quality. The PA6 based grade SAXAMID™ 126F2K4 optimally suits for visible parts in the interior.

90 N/mm²

6400 N/mm²

165 °C

4 kJ/m²



SAXAMID™ 126F10

High rigidity

The high content of glass fibres causes excellent rigidity. Additionally, this PA6 based grade is UL94-HB and HB75 listed.

SAXAMID™ 126F10 can be used for applications like levers for blinkers and windscreen wipers, and wherever a high tensile modulus is required.

209 N/mm²

15400 N/mm²

214 °C

14 kJ/m²



SAXAMID™ 136Q32H

Impact modified


Besides the typical good media resistance, the heat stabilized PA6 grade SAXAMID™ 136Q32H shows a very high impact strength at low temperatures (Charpy notched impact strength of 55 kJ/m²). Possible applications for this material are snap connections and cable guide trays.

56 N/mm²

2000 N/mm²

54 °C

55 kJ/m² (-30 °C)

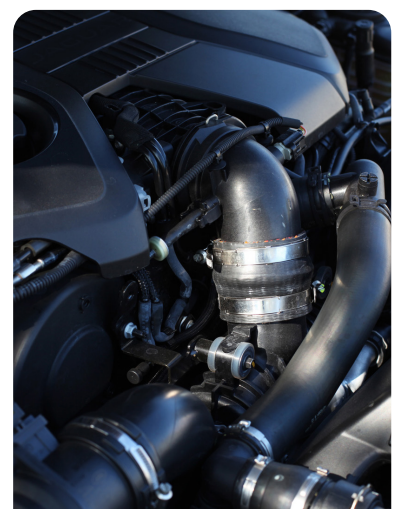

SAXAMID™ 226MW2K4UH

Scratch resistant

SAXAMID™ 226MW2K4UH combines mineral filler with glass beads and is additionally UV- and heat-stabilised. This PA66 stands out for dimensional stability and scratch resistance. Among others, housing parts or different filler necks for various media can be realized with this injection moulding grade.

82 N/mm²

5400 N/mm²

95 °C

3 kJ/m²



SAXAMID™ 226F5RY01

Flame retardant

The UL94-V0 PA66 grade SAXAMID™ 226F5RY01 is a reinforced injection moulding grade with 25% glass fibres, equipped with a halogen free flame retardant system. This material impresses with good processability and is ideally suitable for e-mobility applications like plug connections.

125 N/mm²

9600 N/mm²

242 °C

8 kJ/m²




Tensile strenght (ISO 527-1)

Tensile modulus (ISO 527-1)

HDT A (ISO 179/1eA)

Impact strength Charpy 23 °C
(ISO 179/1eA)

Our scale is Europe

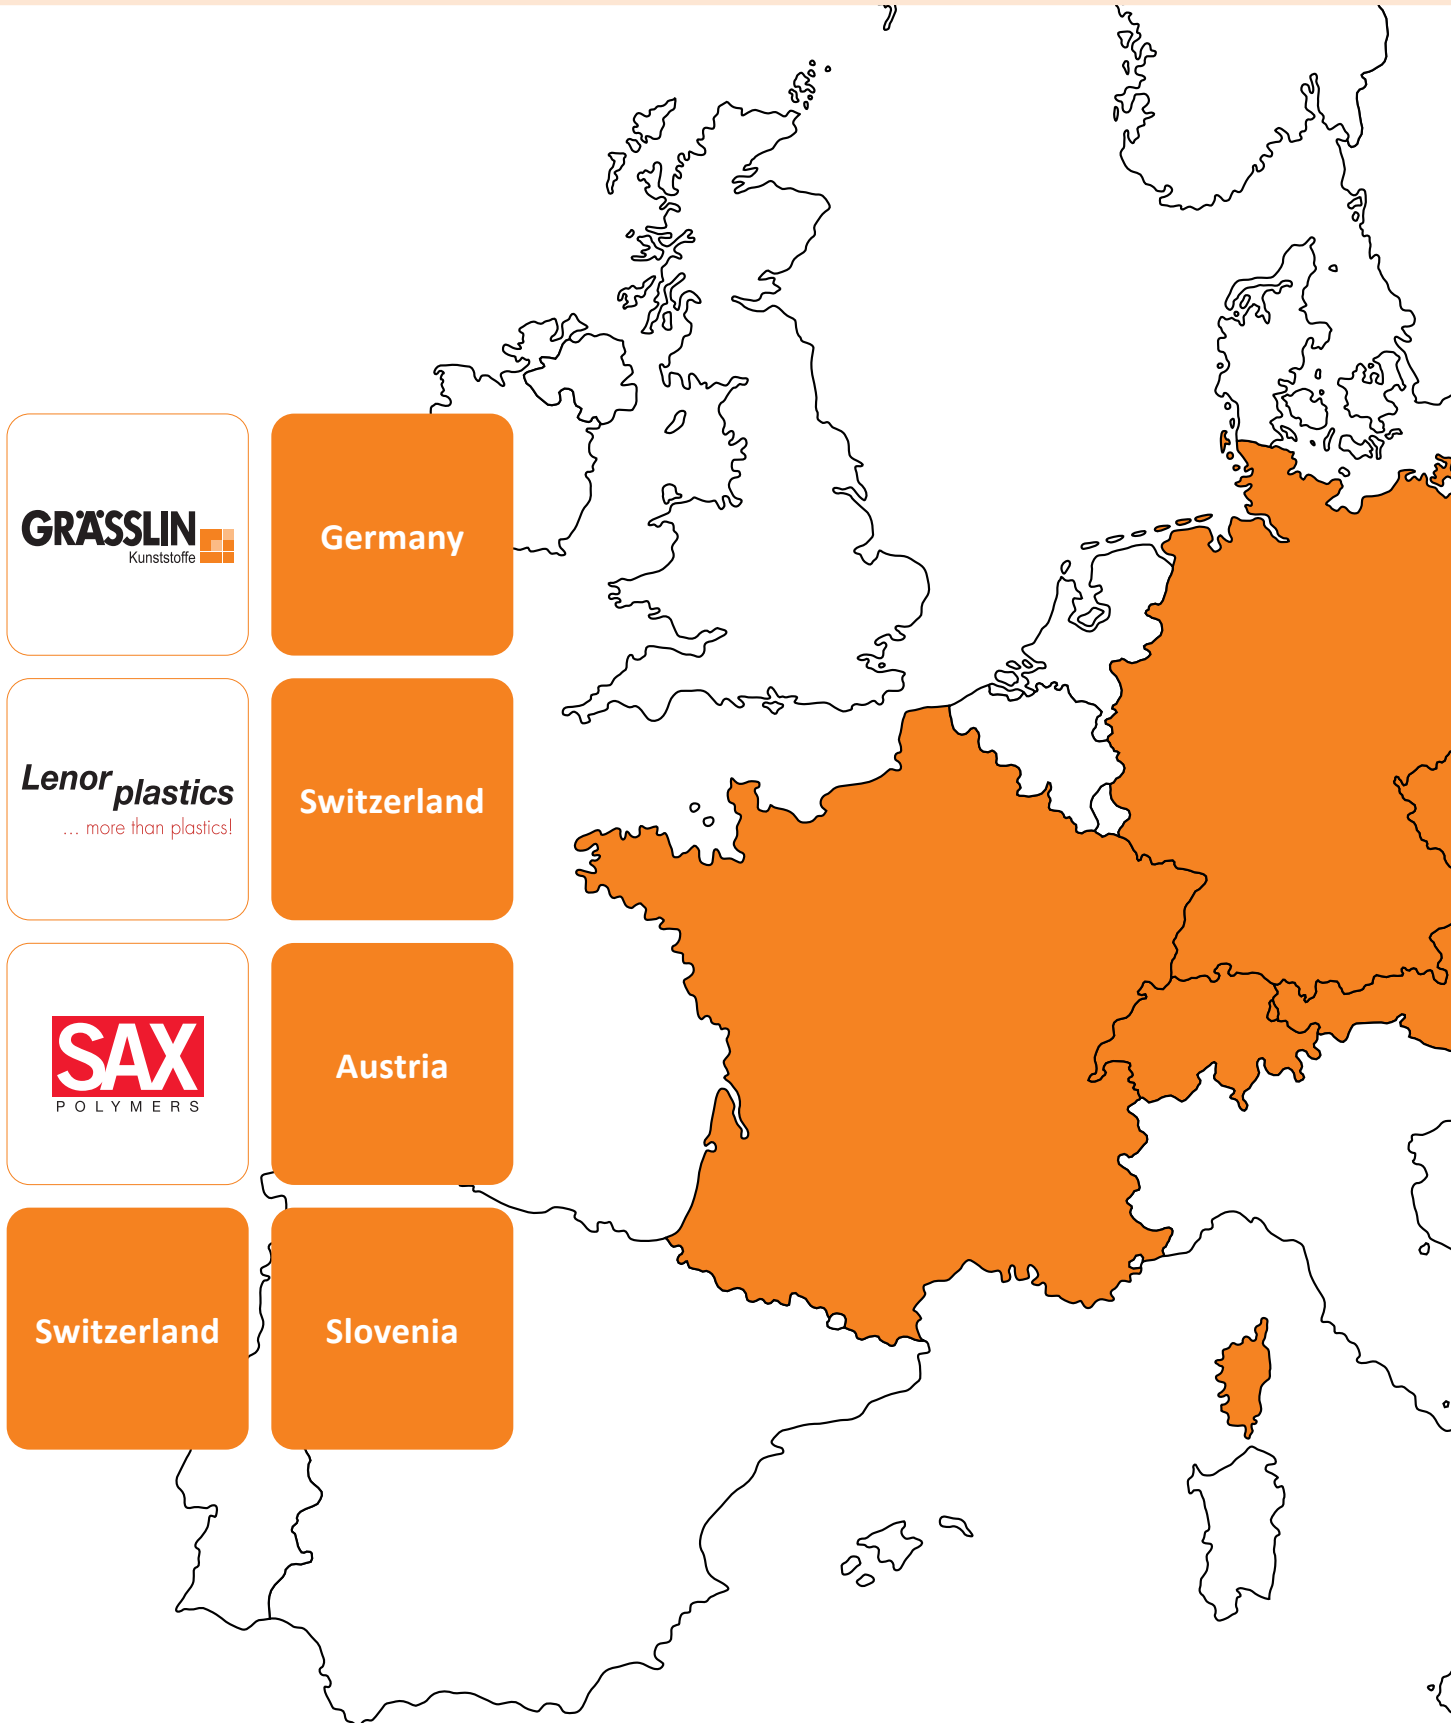

GRÄSSLIN
Kunststoffe

Germany

Lenor plastics
... more than plastics!

Switzerland

SAX
POLYMERS

Austria

Switzerland

Slovenia

Our brands are local. Our services too.



AECTRA
Plastics 

Romania

France

Bulgaria

Plastoplan 
Plastics

Austria

Poland

Czechia

Hungary

Slovakia

Serbia



The **HROMATKA GROUP** is one of the leading groups on the European plastics market. As a partner, the sales companies of the Hromatka Group provide local support in 12 countries. Our account managers, application engineers, and technical support team provide our customers with quick solutions and high-quality products. Our programme is completed by our own production facilities, which are manufactured in-house in two

Our mission

WE IN NUMBERS

No. 1

Distributor in Austria, Czechia, Slovakia, Romania & Switzerland

12

Countries

62

Account Managers

20

Application Engineers

> 6.100

active Customers

14

own Warehouses

> 20

well-known Suppliers

6

Industries in focus

2

own Laboratories

the leading distribution and services. With their local brands and premium CHROMATKA GROUP offer an extensive premium polymer producers. The group is supported by highly-qualified and passionate engineers and technicians. Our teams support customers with a deep understanding of their needs. We offer our own compounds, called SAX Polymers, and have two plants.

WE IN WORDS

Reliable

Competent

Financial solid

Passion for plastics

SAX Polymers Industrie GmbH | Lichtblastr. 8 | A-1220 Vienna | +43 1 250 40 0 | office@saxpolymers.at
SAX Polymers Industrie AG | Im Kessler | CH-9463 Oberriet | +41 71 763 66 00 | office@saxpolymers.ch
www.saxpolymers.com